How to change pollen filter on **Fiat Punto 188** – replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:
FIAT Doblo I Cargo (223) 1.3 JTD 16V Multijet, FIAT Doblo I Cargo (223) 1.9 JTD Multijet, FIAT Idea (350) 1.3 D Multijet, FIAT Idea (350) 1.6 D Multijet, FIAT Idea (350) 1.4 LPG, FIAT Doblo I Cargo (223) 1.2 16V, FIAT Punto II Hatchback (188) 1.2 60, FIAT Punto II Hatchback (188) 1.2 16V 80, FIAT Punto II Hatchback (188) 1.8 130 HGT, FIAT Punto II Hatchback (188) 1.9 JTD 80, FIAT Punto II Hatchback (188) 1.4, FIAT Idea (350) 1.8, FIAT Punto II Hatchback (188) 1.9 DS 60, FIAT Doblo I Estate (119, 223) 1.2, FIAT Doblo I Estate (119, 223) 1.9 D, (+ 34)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – FIAT PUNTO 188.
TOOLS YOU MIGHT NEED:



- Drive socket # 6
- Ratchet wrench


BUY TOOLS

Replacement: pollen filter – Fiat Punto 188. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

REPLACEMENT: POLLEN FILTER – FIAT PUNTO 188. RECOMMENDED SEQUENCE OF STEPS:

1 Move the passenger seat fully backwards.

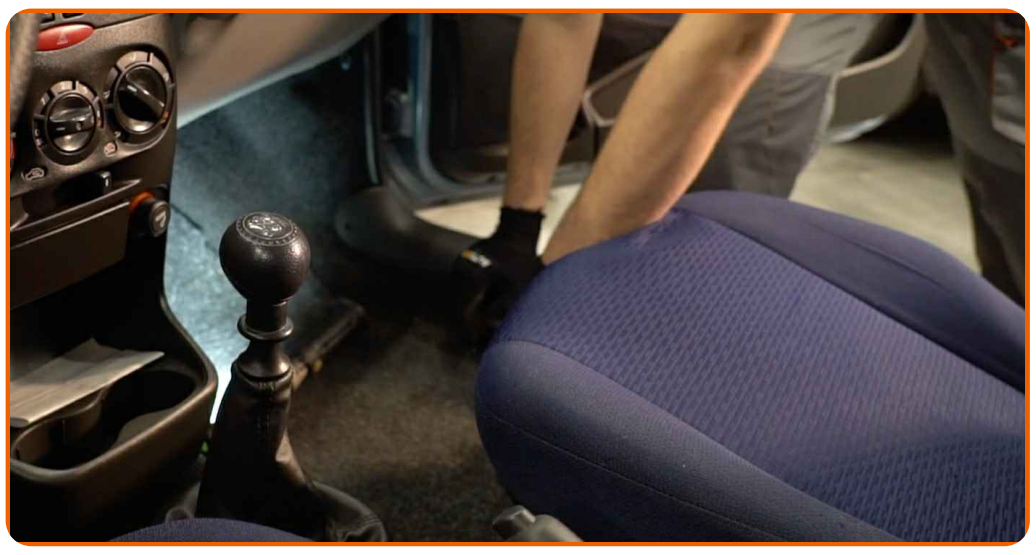


2 Unscrew the fasteners of the cabin filter housing cover. Use a drive socket #6. Use a ratchet wrench.



3 Remove the cabin filter housing cover.



4 Remove the cabin filter.

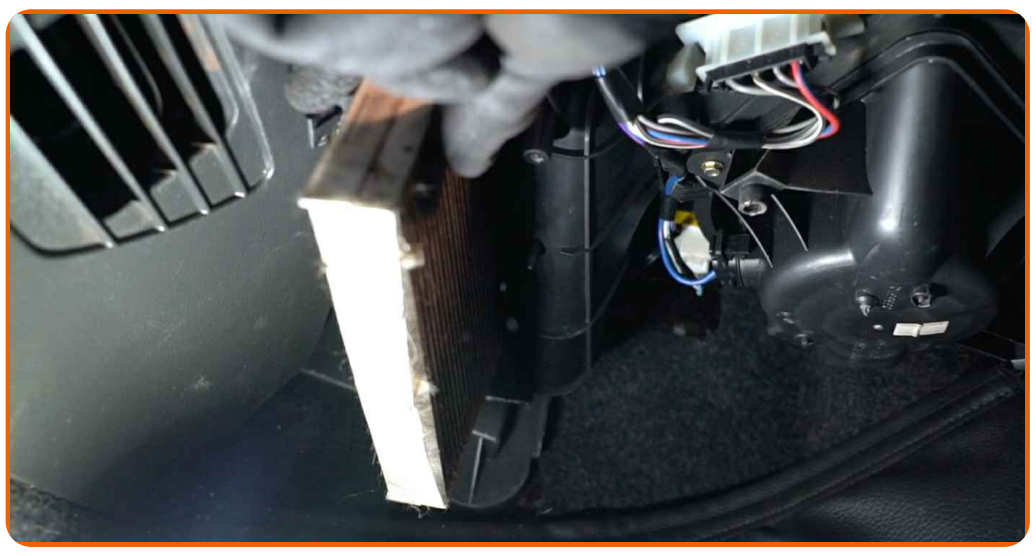

Replacement: pollen filter – Fiat Punto 188. Tip from AUTODOC experts:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

5 Install the cabin filter to its mounting seat.




AUTODOC recommends:

- Replacement: pollen filter – Fiat Punto 188. Be sure to position the filtering element correctly. Avoid misalignment.
- Follow the air flow direction arrow on the filter.
- Attention! Use quality filters – Fiat Punto 188.

6 Reinstall the cabin filter housing cover.




7 Screw in the fasteners of the cabin filter housing cover. Use a drive socket #6. Use a ratchet wrench.

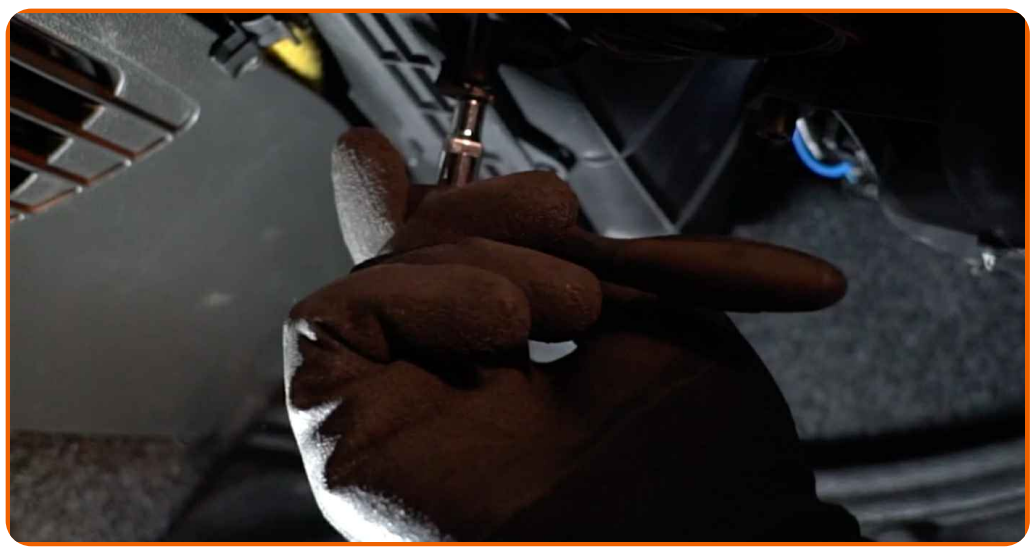

8 Return the passenger seat to its initial position.




9 Switch on the ignition.

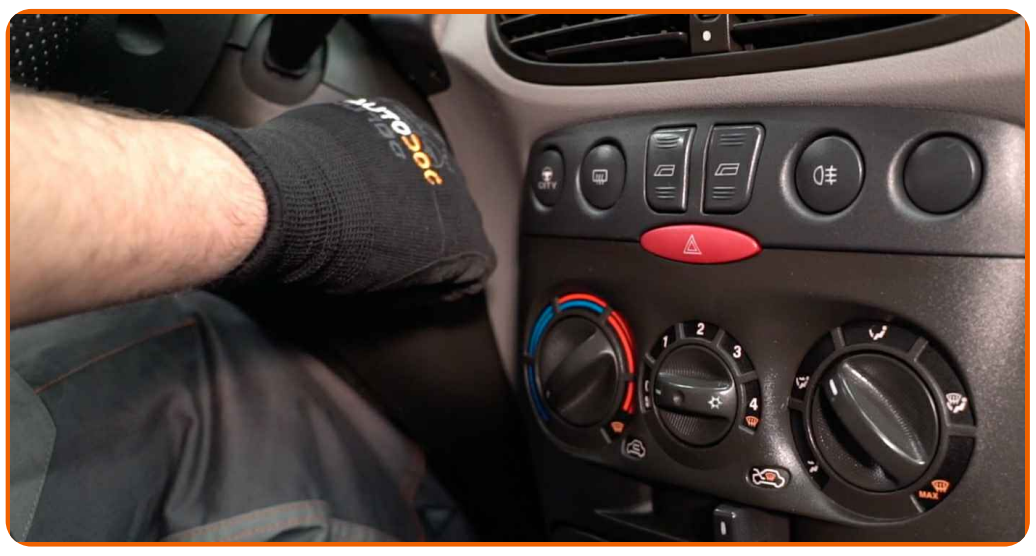

10 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



11 Switch off the ignition.

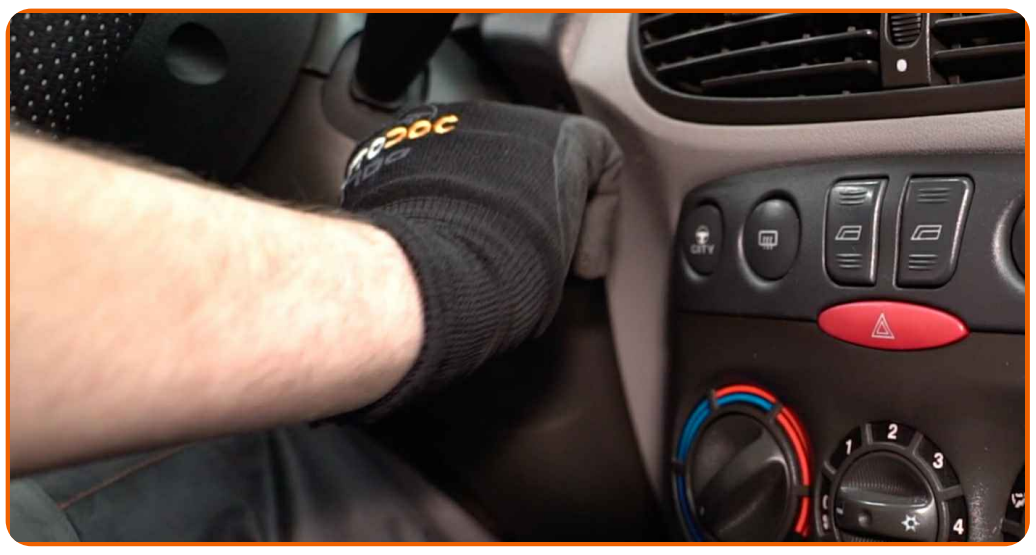

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR FIAT

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR FIAT PUNTO 188

POLLEN FILTER FOR FIAT: BUY NOW

POLLEN FILTER FOR FIAT PUNTO 188: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.